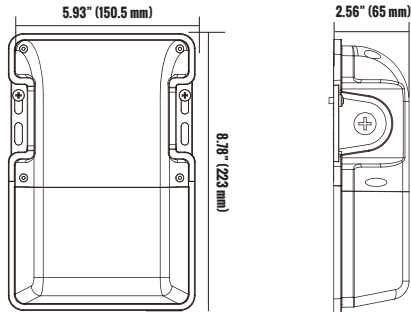


PRODUCT CODE: WPSM25-UCO-FDB-PC
MULTI-WATTAGE AND 3CCT LED MINI WALL PACK WITH PHOTOCEL


PRODUCT DESCRIPTION

The new Etlin-Daniels WPSM25-UCO-FDB-PC Mini-Wall-Pack offers high efficacy, setting flexibility and excellent illumination. This new over-door wall pack features a built-in photocell, while offering a choice between 3 wattages and 3 color temperatures, making it an ideal solution for commercial, industrial and multi-res wall-wash applications.

Whether you are replacing inefficient incandescent, CFL or HID fixtures, or working with new construction, the easy-to-install WPSM25 will provide for a safe and energy efficient environment for building mounted doorway and pathway illumination.

For additional energy savings, take advantage of the 0-10V Continuous Dimming.

FEATURES

- Outdoor LED Light Source
- Sealed die-cast aluminum housing - IP65 Wet Location rated
- Super durable Thermoset Powder-Coat finish for superior resistance to corrosion and weathering
- Built-in photocell - photocell can be disabled
- Junction box or wall-mount ready
- 120-277V
- 0-10V Continuous Dimming
- 3CCT - 3000K, 4000K, 5000K
- Multi-wattage - 15W / 20W / 25W
- 5 year warranty
- L70 - 50,000 hours
- DLC 5.1 Standard

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	SYSTEM EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
LUMILEDS	120 CHIPS	15W - 3000K - 1939LM / 4000K - 2187LM / 5000K - 2104LM 20W - 3000K - 2496LM / 4000K - 2871LM / 5000K - 2711LM 25W - 3000K - 3074LM / 4000K - 3487LM / 5000K - 3327LM			122.9 - 145.8 LM / W	>80 CRI	>85%	>0.90	<20%

PRODUCT SPECIFICATIONS

VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120-277V	50-60HZ	ALUMINUM / POLYCARBONATE OPTICAL LENS INCLUDED	IP65	>50,000 HOURS	-40°C ~ -50°C -40°F ~ -122°F	-40°C ~ -50°C -40°F ~ -122°F	8.78 X 5.93 X 2.56 INCHES (223 X 150.5 X 65 MM)	6.29 X 9.05 X 2.95 INCHES (160 X 230 X 75 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD

WALL MOUNT

FIXTURE COLOR

DARK BROWN

CONTROL TYPE

**PHOTOCELL
0-10V CONTINUOUS DIMMING**

PRODUCT CODE: WPSM25-UCO-FDB-PC
MULTI-WATTAGE AND 3CCT LED MINI WALL PACK WITH PHOTOCEL

DLC LISTING

ED Model Number	Technical Requirements Version	Product ID	Listed Model Number	Category	Primary Use Designation
WPSM25-UCO-FDB-PC	DLC 5.1 Premium	S-GNZEI6	WPSM25-UCO-FDB-PC	Outdoor Luminaires	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires

CERTIFICATIONS


CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP



ORDERING INFORMATION - WPS13 SERIES

SERIES	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	LENS	FINISH	PHOTOCELL
E.G. WPS	M25	U	C	O	F	DB	PC
WPS - WALL PACK	M25 -	U - 120 - 277V	C - CHANGEABLE COLOR TEMP.	O - 0 - 10V	F - FROSTED	DB - DARK BROWN	PC - PHOTOCELL
SMALL	MULTI-WATTAGE -		- 3000K / 4000K / 5000K	CONTINUOUS			INSTALLED
	15W / 20W / 25W			DIMMING			

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com