


Recessed LED Gimbal Lights



Product Code	Input Voltage	Power	Lumen	Beam Angle	CCT	Body Color	Size
CL-DM-3.5-8-5CCT-WH	90-130 VAC	8 W	830 lm	40°	5CCT Adjustable	White	3.5inch
CL-DM-3.5-8-5CCT-BL	90-130 VAC	8 W	830 lm	40°	2700K 3000K	Black	3.5inch
CL-DM-49-5CCT-WH	90-130 VAC	9 W	950 lm	40°	3500K 4000K	White	4 inch
CL-DM-49-5CCT-BL	90-130 VAC	9 W	950 lm	40°	5000K	Black	4 inch

- Durable aluminum body
- Isolated driver, prevents electric shock
- Suitable for wet locations
- Triac dimmable subject to proper dimmer
- IC rated, safe to be in direct contact with insulation
- IP 20
- PF >0.90
- CRI >85
- cETL approved
- No flicker
- FT4 wire, Airtight
- Lifetime >50,000 hrs
- 5 years warranty

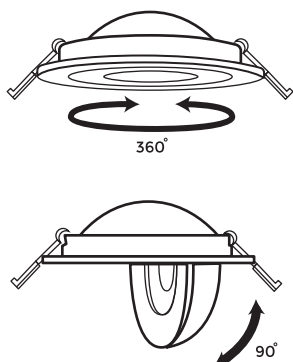