

Recessed Linear Blade




CL-LB5-T1-10-38D




CL-LB10-T1-20-38D

Product Code	Input Voltage	Power	Lumen	CCT	Beam Angle
CL-LB5-T1-10-38D-3K	120 VAC	10W	600lm	3000K	38°
CL-LB5-T1-10-38D-4K	120 VAC	10W	600lm	4000K	38°
CL-LB10-T1-20-38D-3K	120 VAC	20W	1650lm	3000K	38°
CL-LB10-T1-20-38D-4K	120 VAC	20W	1650lm	4000K	38°

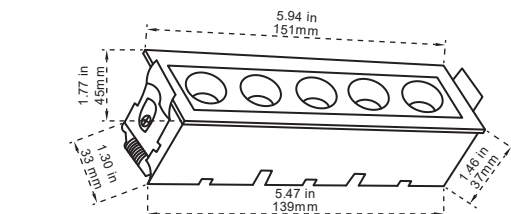

L5.79 * W1.38 in
L147 * W35 mm

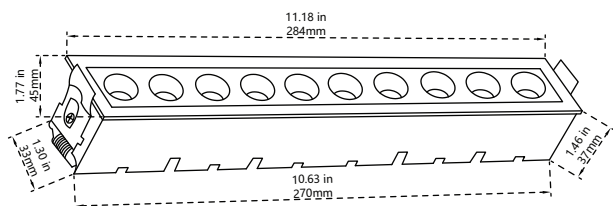

L11 * W1.38 in
L281 * W35 mm

- Suitable for damp locations
- Triac Dimmable
- CRI >90
- PF >0.9
- cETL approved
- Flicker free
- Lifetime >50,000 hrs
- 5 years warranty



Body color: Black and White