


PRODUCT CODE: CL108P-115WM-PF5C9N

8 INCH APERTURE CLOSET LIGHT SURFACE MOUNT 5CCT





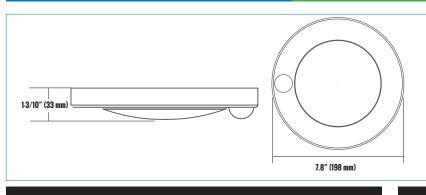

PRODUCT DESCRIPTION

The new Etlin-Daniels Low profile LED Closet Light CL108P-115WM-PF5C9N offers compact design, enhanced energy savings, glare free illumination, all with a built-in PIR Sensor. The aluminum housing will dissipate what little heat the diode array produces and the easy-to-remove frosted polycarbonate lens allows for simply, quick installation.

This new generation is equipped with a 5CCT switch allowing for a choice between 5 available color temperatures and is now 90CRI for enhanced color definition. The CL108P comes with multiple keyless slot locations to attach to the j-box, providing optimal Sensor positioning for its auto on/off function. Once the space is vacated, the sensor will automatically shut off the fixture in 30 seconds.

The new generation CL108P is the perfect solution to illuminate closets, garbage rooms, small storage rooms, washrooms, basements, residential garages - anywhere a lighting fixture may be left on when the space is vacated.

FEATURES

- · LED Indoor Light Source
- Surface Mount low profile 1-1/3" deep housing // 8" diameter
- Durable aluminum body with frosted polycarbonate lens.
- · 120\
- . 90CRI
- 5CCT 2700K/3000K/3500K/4000K/5000K
- Wet location rated
- Keyless slot mounting to j-box
- PIR Sensor built-in 30 seconds to off when space is vacated
- 5 year warranty
- · L70 50,000 hours
- · Energy Star Certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

SYSTEM EFFICACY	M EFFICACY LUMENS COLOR TEMPERATURE CRI		CRI	VOLTAGE	POWER FREQ.	
2700K = 60.53LM/W 3000K = 62.86LM/W 3500K = 65.4LM/W 4000K = 61.2LM/W 5000K = 57.2LM/W	2700K = 908 LM 3000K = 942.9 LM 3500K = 987.21 LM 4000K = 918.1 LM 5000K = 858.1 LM	CHANGEABLE: 2700K / 3000K 3500K / 4000K / 5000K	>90CRI	120VAC	60НZ	

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	PRODUCT DIMENSIONS	CARTON SIZE			
15W PC PLASTIC / METAL >50,000 HOURS		>50,000 HOURS	7.8 x 1 INCHES 6.125 X 6.125 X 1.375 INCHES (198 x 33 MM) (155 X 155 X 35 MM)				
			MOTALL ATION METHOD	FIVELINE COLOR (DIFFLICE	CONTROL TURE		

	INSTALLATION METHOD	FIXTURE COLOR/DIFFUSER	CONTROL TYPE
ADDITIONAL INFORMATION	CEILING MOUNT	WHITE MATTE / FROSTED	NON-DIMMABLE PIR SENSOR



CATALOG #	TYPE
PROJECT	DATE
PREPARED BY	DAIL

PRODUCT CODE: CL108P-115WM-PF5C9N

8 INCH APERTURE CLOSET LIGHT SURFACE MOUNT 5CCT

ENERGY STAR LISTING

ED Model Number Technical Requirements Version		ENERGY STAR Unique ID	Listed Model Number	Category	Primary Use Designation	
CL108P-115WM-PF5C9N	ES2.0	3356765	CL108P-115WM-PF5C9N	Indoor	Downlight Surface Mount	

CERTIFICATIONS









CAN ICES-005 (B) / NMB-005 (B)



ORDERING INFORMATION - CL SERIES

SERIES	SIZE	CONTROL Type	VOLTAGE	WATTAGE	FINISH	DIFFUSER	COLOR TEMPERATURE	CRI	DIMMABLE
CL10	8	P	1	15	WM	PF	5C	9	N
CL10 - CLOSET LIGHT	8 - 8 INCH	P = PIR SENSOR	1=120V	15=15W	WH=WHITE MATTE	PF - PC FROSTED	C = 5CCT	90 = CRI >90	N = NO
							COLOR CHANGEABLE:		
							2700K/3000K/3500K		
							4000K/5000K		_

 $\textbf{Head Office -} 1850 \ \text{Wilson Ave.} \cdot \text{Toronto, ON} \cdot \text{M9M 1A1} \cdot \textbf{Tel:} 416.741.7336 \cdot \textbf{Fax:} 416.741.9104 \cdot \textbf{Fax:} 416.741.91$

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com