


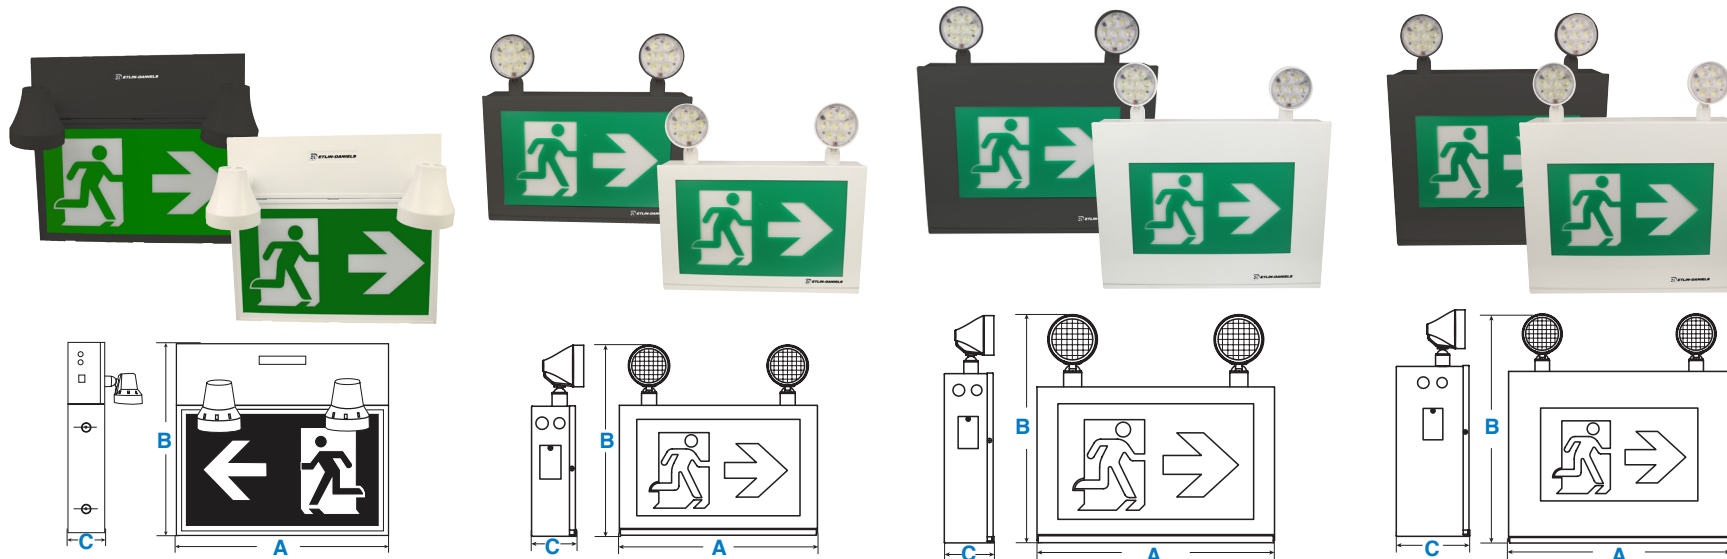

| SERIES | DIMENSIONS       |                  |                 |
|--------|------------------|------------------|-----------------|
|        | A                | B                | C               |
| EC302  | 12.20"<br>310 mm | 11.02"<br>280 mm | 2.13"<br>54 mm  |
| EC3144 | 13.94"<br>354 mm | 13.39"<br>340 mm | 3.11"<br>79 mm  |
| EC3320 | 16.38"<br>416 mm | 16.77"<br>426 mm | 3.66"<br>93 mm  |
| EC3500 | 15.32"<br>389 mm | 17.04"<br>433 mm | 5.51"<br>140 mm |

| SERIES | OUTPUT VOLTAGE | WATTAGE | REMOTE CAPABLE | WATTAGE CAPACITY |        |        |         |
|--------|----------------|---------|----------------|------------------|--------|--------|---------|
|        |                |         |                | 30 MIN           | 60 MIN | 90 MIN | 120 MIN |
| EC302  | 6V             | 36W     | 24W            | 34W              | 18W    | 12W    | 10W     |
| EC3144 | 24V            | 144W    | 134W           | 142W             | 71W    | 47W    | 35W     |
| EC3320 | 24V            | 320W    | 310W           | 318W             | 159W   | 106W   | 79W     |
| EC3500 | 24V            | 500W    | 490W           | 498W             | 249W   | 166W   | 124W    |

### DESIGN:

- Rugged steel housing – built for large battery capacity.
- Thermoplastic, adjustable LED Combo Heads.
- Universal Spider pattern knockouts and keyhole slots stamped in back of housing for mounting.
- Side mounting available.
- 3 Running Man pictogram legends are supplied for directional orientation – single & double sided.
- White powder coat finish is standard.  
Black powder coat also available.
- Top Combo Head Mounting.

### CIRCUITS:

- 120/347V, 50/60Hz Input.
- 6 V DC / 24 V DC emergency power output available.
- Wattage capabilities from 36W to 500W.
- 30 Minutes Emergency Power duration time is standard.
- Push Button test switch / Pilot LED for AC on and Charge Indicator.
- Solid state design.
- Surge Protection – 1500V.
- Maintenance Free Lead Acid Battery.
- Complete Battery Recharge time from 24-50 hours.

### CERTIFICATIONS:

- cCSAus
- Complies to CSA 22.2 #141-15
- Meets ICES-005 Requirements

• 24 HOURS CHARGING TIME • 50,000 HOURS LIFE SPAN • 3 YEARS WARRANTY • 5°C - 30°C OPERATING TEMPERATURE

| SERIES | PART NUMBER        | OUTPUT VOLTAGE | HEADS  | COLOUR | POWER FACTOR            | WATTAGE CONSUMED | WATTAGE | REMOTE CAPABLE | INPUT POWER | LUMENS | BATTERY TYPE & CAPACITY |
|--------|--------------------|----------------|--------|--------|-------------------------|------------------|---------|----------------|-------------|--------|-------------------------|
| EC302  | WHM-A13-BB-GU-10RC | 6              | 2 x 5W | WHITE  | 120 - .90<br>347V - .90 | 10 - 12W         | 34W     | 24W            | 10 - 12W    | 755 LM | LEAD ACID<br>6V<br>6AH  |
|        | BLM-A13-BB-GU-10RC |                |        | BLACK  |                         |                  |         |                |             |        |                         |

• 50 HOURS CHARGING TIME • 17,000 HOURS LIFE SPAN • 2 YEARS WARRANTY • 15°C - 35°C OPERATING TEMPERATURE

| SERIES | PART NUMBER           | OUTPUT VOLTAGE | HEADS  | COLOUR | POWER FACTOR            | WATTAGE CONSUMED | WATTAGE | REMOTE CAPABLE | INPUT POWER | LUMENS | BATTERY TYPE & CAPACITY    |
|--------|-----------------------|----------------|--------|--------|-------------------------|------------------|---------|----------------|-------------|--------|----------------------------|
| EC3144 | WHM-A13U24-BB-GU-10RC | 24             | 2 x 5W | WHITE  | 120 - .85<br>347V - .85 | 5 - 35W          | 144W    | 134W           | 27.5 - 39W  | 755 LM | LEAD ACID<br>12V<br>8AH*2  |
|        | BLM-A13U24-BB-GU-10RC |                |        | BLACK  |                         |                  |         |                |             |        |                            |
| EC3320 | WHM-A13U24-BB-GU-10RC | 24             | 2 x 5W | WHITE  | 120 - .85<br>347V - .85 | 5 - 82W          | 320W    | 310W           | 46 - 63W    | 755 LM | LEAD ACID<br>12V<br>18AH*2 |
|        | BLM-A13U24-BB-GU-10RC |                |        | BLACK  |                         |                  |         |                |             |        |                            |
| EC3500 | WHM-A13U24-BB-GU-10RC | 24             | 2 x 5W | WHITE  | 120 - .85<br>347V - .85 | 5 - 82W          | 500W    | 490W           | 48 - 73W    | 755 LM | LEAD ACID<br>12V<br>26AH*2 |
|        | BLM-A13U24-BB-GU-10RC |                |        | BLACK  |                         |                  |         |                |             |        |                            |



CAN ICES-005 (B) / NMB-005 (B)

Trusted in Electrical and Lighting Since 1949

Confiance en Électricité et Éclairage Depuis 1949

1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104 · Toll Free in Canada: 1.800.661.9610  
For sales/service questions - sales@etlin.com · www.etlin-daniels.com