


# FLUORESCENT LAMPHOLDERS MEDIUM BI-PIN G13 FOR T-8/T-12 LAMPS

## FL005 Series - Low Profile Turn Type Lampholders




D9



- White polycarbonate body, rated 110°C
- Turn lock type, low profile
- Quick connect push-in wire terminals for 18 AWG solid wire  $\frac{5}{16}$ "
- For a 0.023" - 0.040" (0.6 mm - 1.0 mm) panel thickness
- Two wire ports per terminal for easy harness wiring

- Available shunted for use with instant start electronic ballasts; saves time and makes wiring easier
- Rated 660W, 600V, suitable for all new HO lamps
- Many models to choose from
- cCSA<sub>US</sub> Certified / cUL<sub>US</sub> Listed
- Circle I s5487 Pending for shunted version(s)

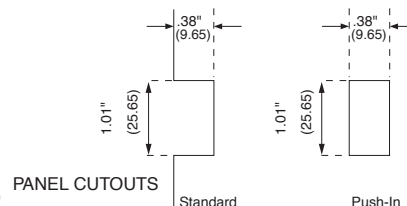

<b>Solid Shoulder, Standard Profile</b> 	<b>FL005*</b>	<b>Low Profile with Captive Nut and Screw Assembled</b> 	<b>FL005-A*</b>
<b>Solid Shoulder, with Captive Nut, no Screw</b> 	<b>FL005-C*Δ</b>	<b>Low Profile with Captive Nut Installed, Screw Packed Separately</b> 	<b>FL005-U*Δ</b>
<b>Flexible Snap-In Shoulder</b> 	<b>FL005-W*</b>	<b>Flexible Snap-In Shoulder, Captive Nut</b> 	<b>FL005-WC*Δ</b>
<b>Snap-In Shoulder, With Locating Nib</b> 	<b>FL005-WN</b>	<b>Snap-In Shoulder, w/ Locating Nib, Externally Shunted</b> 	<b>FL005-WEN</b>
<b>Snap-In Shoulder, w/ Locating Nib, Externally Shunted</b> 	<b>FL005-WPS</b>	<b>Disconnect version</b> 	<b>FL005-D</b>

Δ Add "-C" after product code for captive nut on models with nut slot