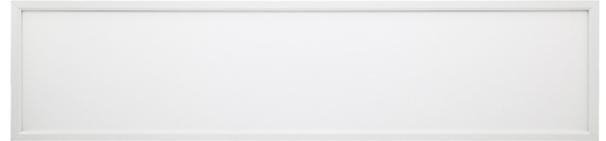
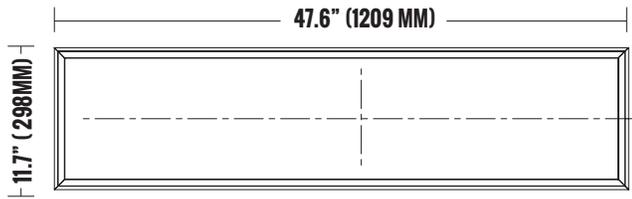


PRODUCT CODE: RTBP514P2-M40WCO-WH
1X4 LED BACK LIT PANEL/MULTI-WATTAGE/3CCT


PRODUCT DESCRIPTION

The new Etlin-Daniels generation of RTBP514P2-M40WCO-WH 1 x 4 LED Back Lit Flat Panel offers excellent, flicker-free lighting, increased energy savings and greatly reduced maintenance over traditional fluorescent troffers. The PMMA lens provides for even and glare-free illumination over the fixture's life.

This new P2 generation is available in 120-347V and also features multi-wattage and 3CCT switching for the utmost in convenience, reducing inventory stress while also eliminating contractor installation issues with either wrong color or wattage. And this new P2 generation is 125lm/w efficacy - DLC5.1 Premium for best available utility rebate status.

There are 4 mounting options available - recessed in t-bar, recessed drywall, surface mount or suspended. For further energy savings, take advantage of the available 0-10V Continuous Dimming.

The new Etlin-Daniels RTBP5P2-M Series is the perfect compliment for any office, educational, healthcare, commercial or industrial applications, whether they are employed to retrofit or upgrade an existing site, or installed in a new build.

FEATURES

- Indoor LED Light Source
- Light weight, durable aluminum and polycarbonate housing.
- PMMA surface illumination for glare free uniformity.
- Flicker free performance.
- 4 mounting options - recessed t-bar, recessed drywall, surface & suspended
- 120-347V / 125lm/w
- Multi-wattage - 25W / 30W / 40W
- 3CCT - 3500K / 4000K / 5000K
- Damp Location rated
- Earthquake clips for secure recessed applications
- 0-10V Continuous Dimming
- 5 year warranty
- L70 - 50,000 hours.
- DLC5.1 Premium

SOLD IN PACKAGES OF 2 UNITS

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	BEAM ANGLE	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
RUNLITE 2835	96 CHIPS	25W - 3500K - 3149 LM / 4000K - 3160 LM / 5000K - 3157 LM 30W - 3500K - 3758 LM / 4000K - 3753 LM / 5000K - 3796 LM 40W - 3500K - 5006 LM / 4000K - 5002 LM / 5000K - 5015 LM			125 - 126 LM/W	>80 CRI	110°	>88%	>0.90	<15%

PRODUCT SPECIFICATIONS

VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120-347V	50-60HZ	ALUMINUM	>50,000 HOURS	-25°C~40°C -13°F~104°F	-25°C~40°C -13°F~104°F	47.6 X 11.73 X 1.2 INCHES (1209 X 298 X 30 MM)	48.9 X 3.35 X 13 INCHES (1242 X 85 X 331 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD

RECESSED/SURFACE/SUSPENDED

FIXTURE COLOR

WHITE ALUMINUM FRAME

CONTROL TYPE

0-10V CONTINUOUS DIMMING

PRODUCT CODE: RTBP514P2-M40WC0-WH

1X4 LED BACK LIT PANEL/MULTI-WATTAGE/3CCT



DLC LISTING

ED Model Number	Technical Requirements Version	Product ID	Listed Model Number	Category	Primary Use Designation
RTBP514P2-M40WC0-WH	DLC 5.1 Premium	S-YHNPkd	RTBP514P2-M40WC0-WH	Indoor Luminaires	1x4 Luminaires for Ambient Lighting of Interior Commercial Spaces
RTBP514P2-M40WC0-WH	DLC 5.1 Premium	S-MLV684	RTBP514P2-M40WC0-WH	Indoor Luminaires	1x4 Luminaires for Ambient Lighting of Interior Commercial Spaces

CERTIFICATIONS



CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP



MOUNTING OPTIONS



CABLE SUSPENSION KIT FOR FLAT PANEL - SUSPENSION CABLES 1 METER IN LENGTH
PART#: RTBP5SPK-M



DRYWALL KIT FOR RTBP514-M / RTBP514P-M
PART#: RTBP5DWK-14M



SURFACE MOUNT KIT FOR RTBP514-M / RTBP514P-M
PART#: RTBP5SMK-14M

WARNING - BACK LIT FLAT PANELS REQUIRE BACK LIT SURFACE MOUNT KITS.

ORDERING INFORMATION - RTBP5 SERIES

SERIES	SIZE	PREMIUM	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH
E.G. RTBP5	14	P2	M40	W	C	0	WH
RTBP5 - BACKLIT PANEL	14 - 1X4	P2 - PREMIUM	M40 - MULTI-WATTAGE	W - 120-347V	C - CHANGEABLE COLOR	0 - 0-10V	WH - WHITE
5 SERIES			25W / 30W / 40W		3500K / 4000K / 5000K	CONTINUOUS DIMMING	

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com