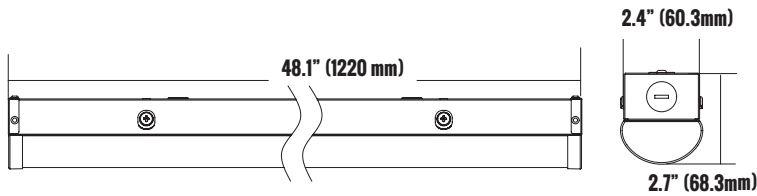


PRODUCT CODE: STL64-M40WL4CO-WH-M
4FT. LED LINEAR STRIP / MICROWAVE SENSOR INSTALLED


PRODUCT DESCRIPTION

The new Etlin-Daniels STL64-M40WL4CO-WH-M 4 foot LED Strip fixture offers the latest in quality, multi-features and performance. With its slim design, the STL64 has external buttons that easily release the lighting array and cover, making the internal components easily accessible. And you can choose between 25W, 32W and 40W in light levels as well as 3000K, 3500K, 4000K and 5000K in color temperatures. Microwave Sensor Pre-Installed - Requires STL6-RCS Remote for Settings.

The driver offers 2 types of control - it is equipped with available 0-10V Continuous Dimming circuitry, and also has 2 low voltage leads that provide for the installation of an Internal Microwave Sensor option - STL6-SENMIC-12V.

The high efficacy of 130lm/w allows for superior energy savings and the frosted lens delivers even and glare-free illumination. End knockouts provide for continuous row mounting / Connection Brackets are available - using the STL6-CBSM for surface mount applications and the STL6-CBSP for suspension mount applications. Wire guards are available to protect from physical shock. An innovative and easy-to-install j-box cover comes with each fixture to ensure that all wires are properly protected and the proper aesthetic is maintained.

FEATURES


- LED Indoor Light Source
- Light weight powder coated metal housing with frosted glare free lens
- Fixtures can be surface or suspension mounted
- End knockouts for continuous row mounting.
- 120-347V
- Damp location rated
- Multi-Wattage Switching - 25W / 32W / 40W
- 4CCT - 3000K / 3500K / 4000K / 5000K
- Microwave Sensor Pre-Installed / Requires Remote to do settings
- J-box covers included
- Wire guards available
- 0-10V Continuous Dimming
- 5 year warranty
- L90 - 51,000 hours
- DLC5.1 Standard - Ambient Lighting /
- DLC5.1 Premium - Stairwells & Passageways

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	BEAM ANGLE	POWER FACTOR	HARMONIC DISTORTION
SMD 2835	180 CHIPS	25W - 3000K - 3394LM / 3500K - 3585LM / 4000K - 3661LM / 5000K - 3671LM 32W - 3000K - 4110LM / 3500K - 4367LM / 4000K - 4480LM / 5000K - 4418LM 40W - 3000K - 4935LM / 3500K - 5322LM / 4000K - 5468LM / 5000K - 5322LM			130LM/W	>80 CRI	130°	>0.90	<20%

PRODUCT SPECIFICATIONS

VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
120-347V	50-60HZ	STEEL/FROSTED LENS	51,000 HOURS	-20°C~+80°C -4°F~+176°F	-20°C~+90°C -4°F~+194°F	48 X 2.40 X 2.70 INCHES (1220 X 60.3 X 68.3 MM)	48.4 X 2.75 X 2.95 INCHES (1230 X 70 X 75 MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD

SUSPENDED OR SURFACE

FIXTURE COLOR

WHITE

CONTROL TYPE

0-10V CONTINUOUS DIMMING

PRODUCT CODE: STL64-M40WL4CO-WH-M
4FT. LED LINEAR STRIP / MICROWAVE SENSOR INSTALLED

DLC LISTING

ED Model Number	Technical Requirements Version	Product ID	Listed Model Number	Category	Primary Use Designation	General Application
STL64-M40WL4CO-WH	DLC 5.1 Premium	S-65BXQF	STL64-M40WL4CO-aa-bb-cc	Outdoor Luminaires	Stairwell and Passageway Luminaires	Mid Output
STL64-M40WL4CO-WH	DLC5.1 Standard	S-V7NDMH	STL64-M40WL4CO-aa-bb-cc	Indoor Luminaires	Low-Bay Luminaires for Commercial and Industrial Buildings	Low-Bay
STL64-M40WL4CO-WH	DLC5.1 Standard	S-Y91KJ3	STL64-M40WL4CO-aa-bb-cc	Indoor Luminaires	Direct Linear Ambient Luminaires	Linear Ambient

CERTIFICATIONS










CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP



MOUNTING OPTIONS/ACCESSORIES

 INTERNAL MICROWAVE SENSOR PART#: STL6-SEMMC-12V	 REMOTE CONTROL FOR MICROWAVE SENSOR PART#: STL6-RCS PART#: STL6-RCS2 (ARRIVAL END AUGUST 2025)	 CHAIN - OPTIONAL PART#: STL6-CH	 V HOOK - OPTIONAL PART#: STL6-VHOOK	 SURFACE MOUNT BRACKET - PART#: STL6-CBSM SUSPENSION MOUNT BRACKET - PART#: STL6-CBSP	 WIRE GUARD - PART#: STL6-WG	 REPLACEMENT LENS - PART#: STL64-LEN
--	--	--	---	--	---	---

ORDERING INFORMATION - STL64 SERIES

SERIES	SIZE	WATTS	VOLTAGE	LOW VOLTAGE	COLOUR TEMPERATURE	DIMMABLE	FINISH	SENSOR
E.G. STL6	4	M40	W	L	4C	0	WH	M
STL6 - STRIP	4 - 4'	M40 -	W - 120-347V	L - 12V OUTPUT	C - CHANGEABLE COLOR	0 - 0-10V	WH - WHITE	M - MICROWAVE
LIGHT		MULTI-WATTAGE			3000K / 3500K /	CONTINUOUS		SENSOR INSTALLED
		25W / 32W / 40W			4000K / 5000K	DIMMING		

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com