

Project :  
Type :  
Drawn by :  
Catalogue No. :  
Date :



G4-D02A



G4-D03

## Specifications

Model No.		<input type="checkbox"/> G4-D02A	<input type="checkbox"/> G4-D03
General	Watts	1.6W	2.3W
	Lumen	130-150LM	200-230LM
	Base	G4	G4
	CCT	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
	Volts	AC DC 12V 50-60Hz	AC DC 12V 50-60Hz
	CRI	>80	>80
	Beam Angel	360 degree	360 degree
	Hours Rated	25,000 hours	25,000 hours
	Product Size	10 *38.5mm	1.35*38.5mm
Electrical	IP Grade	IP20	IP20
	Power Factor	>0.9	>0.9
	Storage temperature	-25°C~+65°C	-25°C~+65°C
	Operating Temperature	-20°C~+45°C (the best in 25*c)	-20°C~+45°C (the best in 25*c)
Physical	Lens Material	Silicon	Silicon
	Housing Color	Clear	Clear
	Weight (g)	2.3	2.6
Additional Information	Additional Info	Dimmable	Dimmable
	Warranty	2 years	2 years
Compliance	Certification	ETL	ETL

## Features & Specifications

### Performance Data


- Available color temperature in 3000K / 4000K / 5000K / 6000K
- 80+ CRI
- Electrical ratings: AC DC 12V 50-60Hz
- Estimated life: 25,000 hours
- Dimming capable
- 0.5kV surge protection (standard)
- -20°C~+45°C (the best in 25°C)

### Compliances


- ETL
- IP20

## Dimensions & Weights

Model	G4-D02A	G4-D03
Diameter in. (mm)	0.39 (10)	0.53 (13.5)
Height in. (mm)	1.51 (38.5)	1.51 (38.5)
Net weight (g)	2.3	2.6




G4-D02A



G4-D03

### Product Details

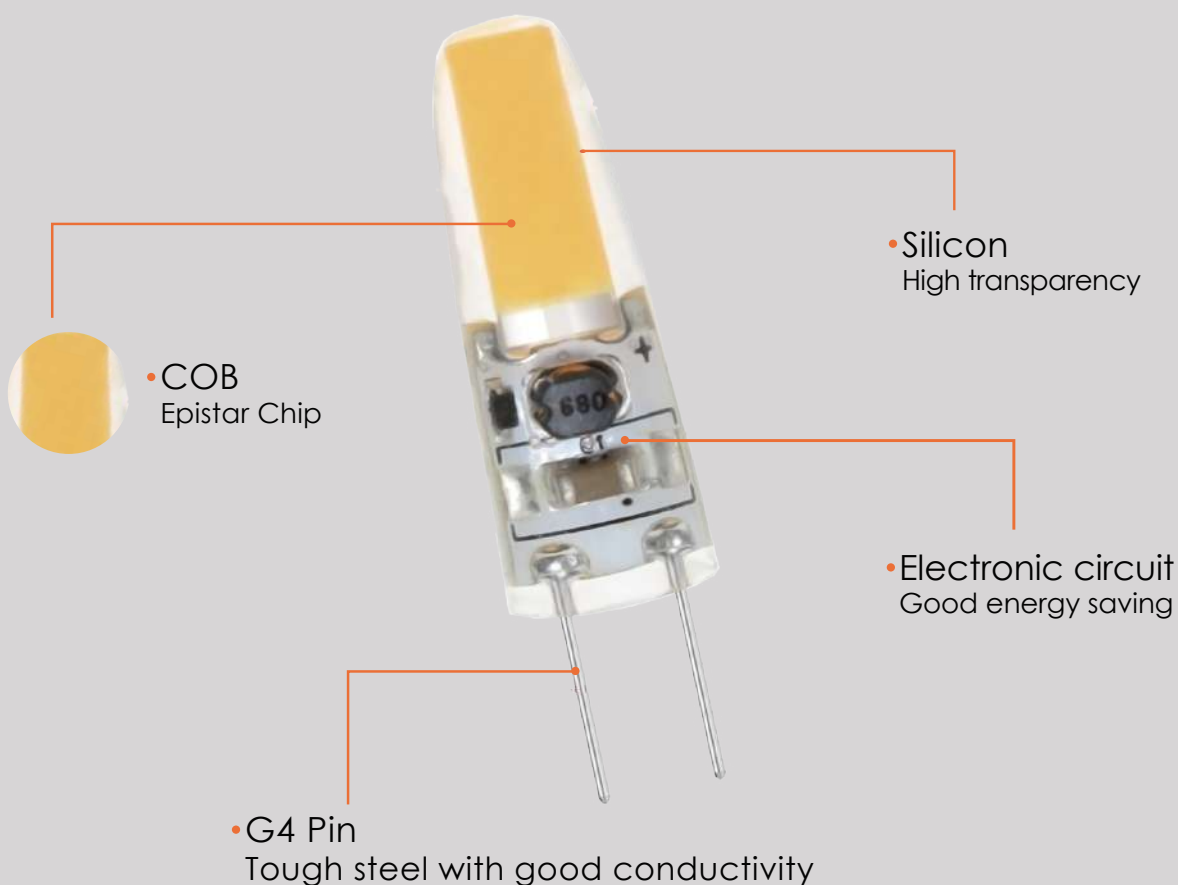

### Lumen Details

Model No.:	Watts (W)	3000K / 4000K / 5000K / 6000K							
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
G4-D02A	1.6W	150LM	95	150LM	95	95	95	95	95
G4-D03	2.3W	230LM	100	230LM	100	100	100	100	100



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

