


### Specifications:

	WHITE	BLACK
Model	PL16-PR5-11W120-5CCT-WSA	PL16-PR5-11W120-5CCT-BSA
Power	11W	11W
CCT	2700K/ 3000K/ 3500K /4000K /5000K	2700K/ 3000K/ 3500K /4000K /5000K
Brightness	760LM	760LM
LED Type	SMD2835 / 90PCS	SMD2835 / 90PCS
Voltage	120V	120V
Power Efficiency	≥0.9	≥0.9
RA	≥80	≥80
Beam Angle	110°	110°
Dimension	5.3"x0.6"	5.3"x0.6"

### Features:

- Built-in driver, 17.5mm thickness
- **White & Black** two different colors available
- Good Quality LGP & diffuser Plate
- Stable design for the whole structure
- SMT technology, ensuring accurate for LEDs on FPCB
- 5 CCT tunable
- 120V, Triac dimming
- 5 Years warranty





Innovation & Quality

[www.votatec.ca](http://www.votatec.ca)

## Perfect LED Mounting

### Uniform Light Distribution

Black dots and shadow on the light, un-uniform lighting, which are the headache in the LED panel field.

### The LED Light Strip




SMT technology, ensuring accurate positions for LEDs on FPCB  
Good quality LGP and diffuser plate  
Stable design for the whole structure  
Above ensures uniform lighting, no black dots and shadow.



Surface Mounted With J-Box


## Slim Flush Mount LED 5 Way CCT Adjustable

### Light Distribution

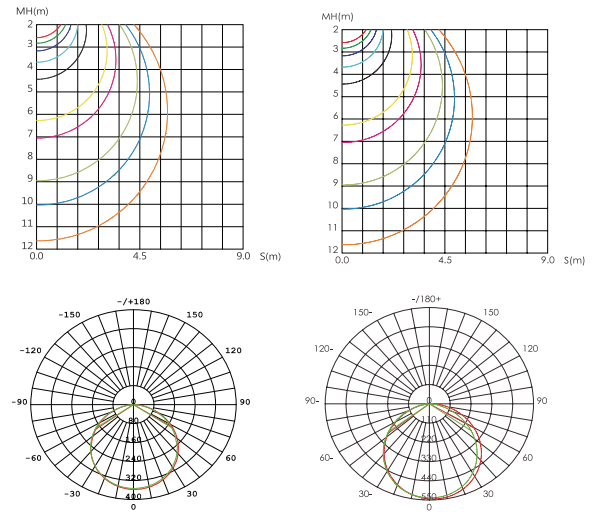



## 5CCT

Changeable 2700K/3000K/3500K/4000K/5000K

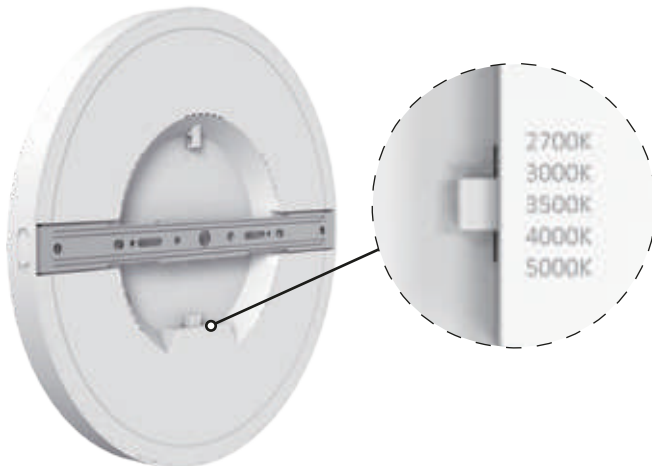

2700K




3000K




3500K

4000K


5000K



### Dimensions:

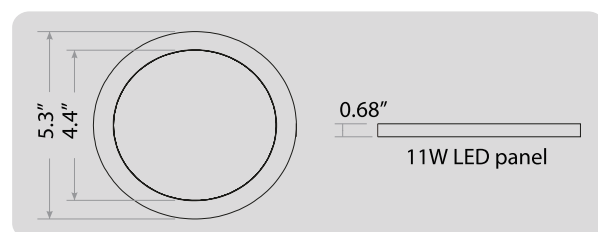

PL16-PR5-11W120-5CCT-WSA

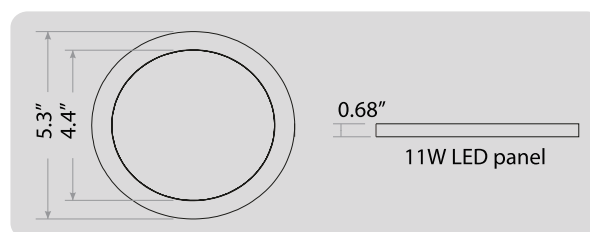

PL16-PR5-11W120-5CCT-BSA

