

FA8
(Included)



R17D
(NOT Included)



Item Number	Type	Wattage (W)	Length (ft)	CCT (Kelvin)	Luminous flux (lm)	CRI (Ra)	Beam Angle (Degree)	Input Voltage
PV-8FT-42WBGOS-00K	B	42W	8	30/35/40/50/65K	5500 lm	> 83	> 220°	120-277V

Double End Power Input & Single End Power Input

Electrical and Photometric Characteristics



Base Type
G13



Nominal Voltage
120V-277V



IP Rating
IP20



Power Factor
>0.9



CRI
> 83



Starting Time
<1.0 s




Lumen Maintenance
50,000Hours




Operating Temp.
-20°C ~ +45°C

Luminous Intensity Distribution Diagram

C Plane Distribution Diagram

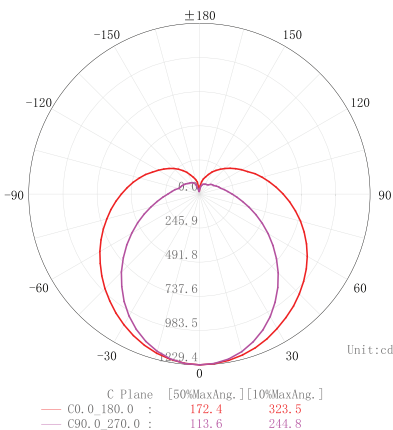

Illuminance-Distance Curve

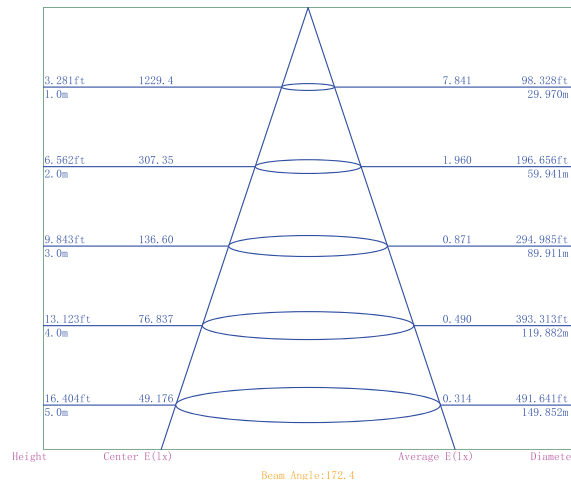

3000K
3500K
4000K
5000K
6500K



Fa8



50,000 H



BEAMANGLE






Innovation & Quality

www.votatec.ca

8ft Glass T8 Tube With Plastic Coating (UL TYPE B)

5Way CCT Adjustable


Dimension Diagram

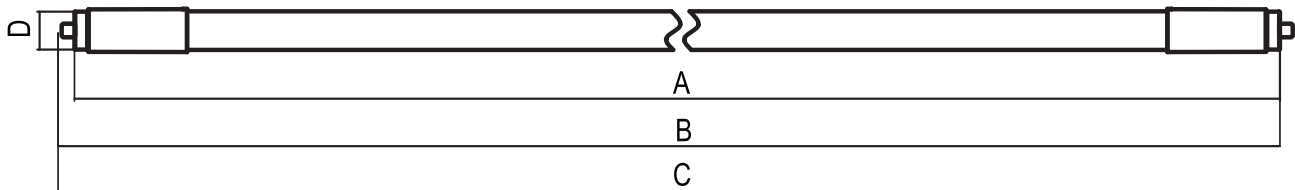

A(max):2367mm(93.2") B(max):2376mm(93.5") C(max):2385mm(93.9") D(max):26mm(1")

Wiring Diagram

TYPE B(AC directly, double end ballast bypass)

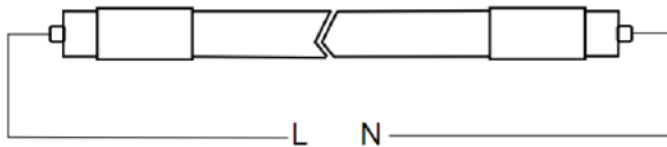

Input voltage: 120-277Vac 50/60Hz



FA8
(Included)



R17D
(NOT Included)
Sells Separatly



Anti-Rotation Clip
(Included)

