
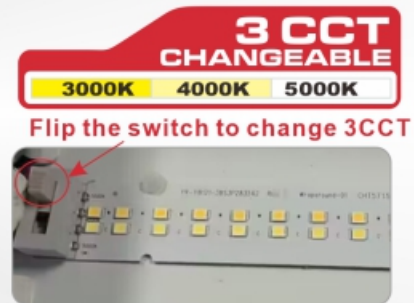


SPECIFICATION

NEXLEDS®
NEXLEDS LTD

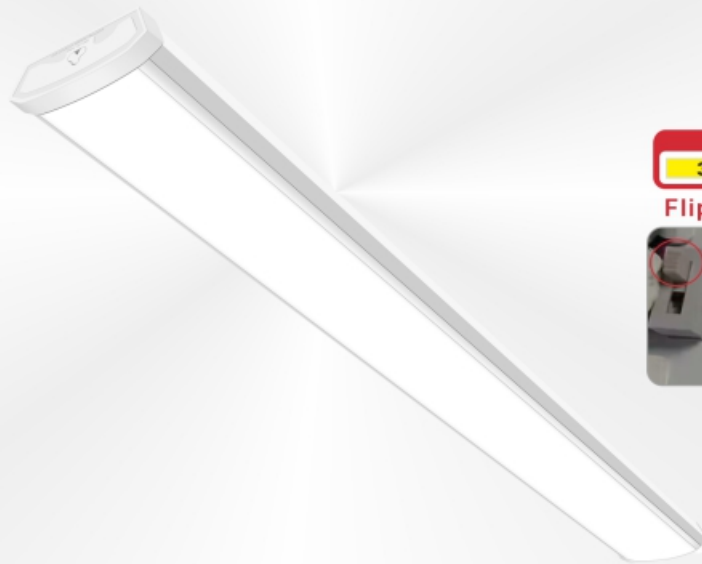

3CCT LED Linear

NX-RALS435-40W

Specification:

Product Name :	3CCT LED LINEAR
Model NO. :	NX-RALS435-40W
Specification :	AC100-130V; 50/60Hz; 40W
Working Temp :	-20~45(°C)
Power Factor :	0.90
Cri(ra) :	>85
Color :	White Color
Light Source :	SMD2835 San'an Chip
Lumen :	4500 lm
Life Time :	30000 hrs
Beam Angle :	120°
Product Size :	47.4*5.4*1.7 inch
Ip :	IP40
Application :	Home, Shop, Hotel
Warranty :	3 years
Standard :	ETL
Color Temp :	3000K-4000K-5000K Changeable



www.nexleds.ca



Email: sales@nexleds.ca


NEXLEDS®

NEXLEDS LTD


SPECIFICATION

NEXLEDS®
NEXLEDS LTD

Dimension(Unit: inch)

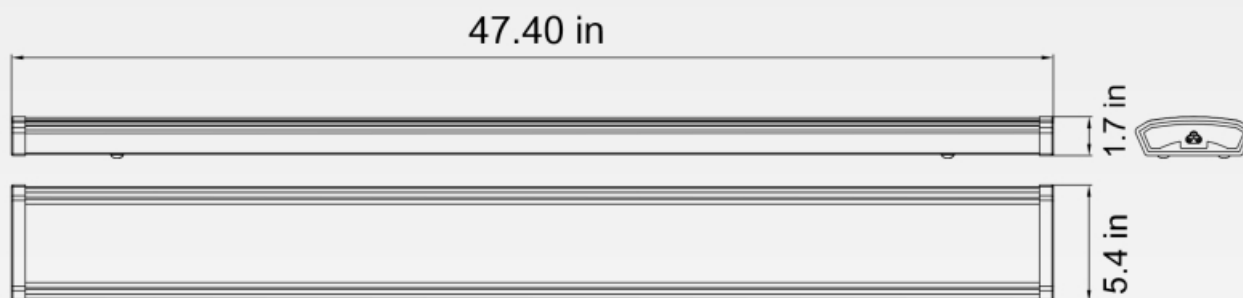

Photometric:

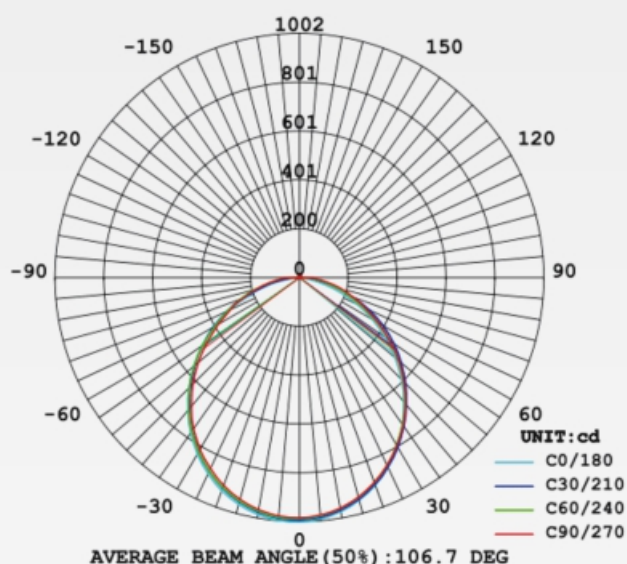

Packing:

NX-RALS435-40W

Inner box (pcs)	Inner box size /inch	G.W. / Inner box
1	L48.4*W5.7*H2.1 inch	1.8KGS
Carton (pcs)	Carton size /inch	G.W. / Cartn
4	L 49.2*W10.12*H6.7 inch	8.4KGS



Instruction:

1. Please read the product specifications carefully first and confirm that the environment is in accordance with the specifications on the specifications before you can install and use them.
2. Before the product is connected to the power supply, make sure the switch is in a disconnected state.
3. Lamps shall be installed by qualified electricians and the wiring shall comply with IEC electrical standards or national standards;
4. This product is suitable for indoor use;
5. Do not use too long or too low voltage in the state of long-term use will affect the normal use of function and life;
6. Shall not be installed in flammable objects and the lamps can't be covered by heat insulation materials or similar materials!
7. When installing, changing and cleaning the lamp, the power supply must be cut off to ensure personal safety;
8. When the lamp is found to work abnormally (self extinguishing or flashing), please check the contact performance of the connecting plug and whether the supply voltage is normal. Often, the failure has not been ruled out, new lights need to be replaced;
9. When the lamp surface needs cleaning, please disconnect the power supply first! Wipe with a soft cloth sticky soapy water wring dry, and then use dry cloth to clean, please don't wait to wipe the surface of the light volatile substance use banana water, please do not spray any chemicals on the lamp, the lamp may otherwise discoloration or damage.
10. Please do not disassemble the product avoid to damage the internal parts. Self removal cannot enjoy warranty service.



www.nexleds.ca



Email: sales@nexleds.ca

NEXLEDS®

NEXLEDS LTD